

PVT Apparatus

Description

The PVT Apparatus is designed to measure the volume of a given amount of gas or liquid as a function of its temperature and pressure. The apparatus is completely automated and is computer controlled in order to yield precise data.


Principle

3333333333

The volume of the chamber of the apparatus is determined by calibration. The nonreacting gas or liquid is introduced into the chamber. The program automatically changes the temperature and pressure to the desired set values. The change in volume is recorded.

Instrument

The instrument consists of a pressure generation, control, and measurement system, a temperature control and measurement system, a stainless steel gas chamber, and a Windows based software for ease of operation and accuracy of the results.

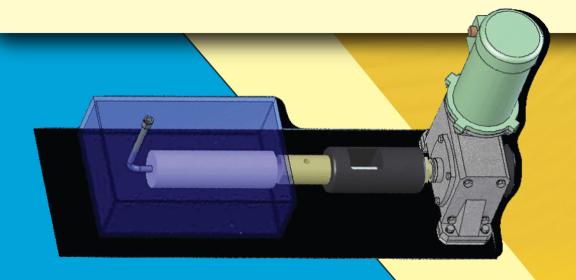

FEATURES

- Fully automated & computer controlled
- Windows based simple operation
- Accurate & Reproducible
- Robust & Requires little maintenance

SPECIFICATIONS

Pressure Generation Fluid	Air/Liquid
Pressure Range	Up to 5,000 psi with liquid
	Up to 200 psi with gas
	Accuracy: 0.25 % FS
Resolution	1/20,000
Temperature Range	Up to 90°C
Accuracy	1 °C
Power Requirement	110/220 VAC, 60/50 HZ

Other Products

- For our advanced pressure products please visit www.app.bz
- For our Porometers, Permeameters, and Porosimeters please visit www.pmiapp.com



Porous Materials, Inc. 20 Outch Mill Road, Ithaca, New York 14580 USA Toll Free US & Canada: 1-800-TK-PMI Phone: (607) 257-5544 Fax: (607) 257-5639 Email: info@pmiapp.com

PMI Europe

Salisburylaan 121, 9820 Merelbere, Belgium Phone: +32 477 796011 Fax: +32 3308544 E-mail: patrice.hellebaut@pmiapp.eu, info@pmiapp.eu



